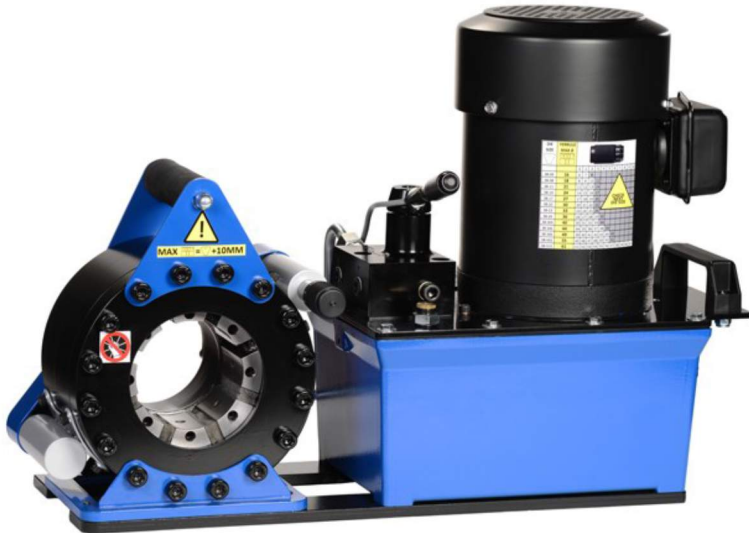


# SM 25L AC


**STANDARD DIE SETS**

	<b>Range (mm)</b>	<b>Length</b>
<b>38-06</b>	6-16	45
<b>38-08</b>	8-18	45
<b>38-11</b>	11-21	45
<b>38-14</b>	14-24	45
<b>38-17</b>	17-27	45
<b>38-20</b>	20-30	55
<b>38-23</b>	23-33	55
<b>38-26</b>	26-36	55
<b>38-30S</b>	30-40	60
<b>38-34S</b>	34-44	60
<b>38-39S</b>	39-49	65
<b>38-45S</b>	45-55	65
<b>38-51S*</b>	51-61	65

\* Max. ferrule diameter before crimping 61 mm

**TECHNICAL SPECIFICATIONS**

<b>Max hose size</b>	1" 4 SH, 1 1/2"
<b>Crimping force (kN):</b>	1200
<b>Max crimping diameter (mm):</b>	61
<b>Max opening diameter (mm):</b>	die diameter + 15
<b>Motor:</b>	0.37kW 230V 1ph 50Hz
Possible to operate with 12V or 24V inverter	
<b>Control :</b>	Micrometer
<b>Master dies opening / Length (mm):</b>	90/64,5
<b>Crimping range (mm):</b>	6 – 61
<b>Weight (kg)</b>	55
<b>Dimensions (LxWxH mm)</b>	630 x 330 x 410

## DHYDRO.COM